

5.70 cond_lex_lesseq

	DESCRIPTION	LINKS	AUTOMATON
Origin	Inspired by [398].		
Constraint	<code>cond_lex_lesseq(VECTOR1, VECTOR2, PREFERENCE_TABLE)</code>		
Type	TUPLE_OF_VALS : <code>collection(val-int)</code>		
Arguments	VECTOR1 : <code>collection(var-dvar)</code> VECTOR2 : <code>collection(var-dvar)</code> PREFERENCE_TABLE : <code>collection(tuple - TUPLE_OF_VALS)</code>		
Restrictions	<code>required(TUPLE_OF_VALS, val)</code> <code>required(VECTOR1, var)</code> <code>required(VECTOR2, var)</code> $ VECTOR1 = VECTOR2 $ $ VECTOR1 = TUPLE_OF_VALS $ <code>required(PREFERENCE_TABLE, tuple)</code> <code>same_size(PREFERENCE_TABLE, tuple)</code> <code>distinct(PREFERENCE_TABLE, [])</code> <code>in_relation(VECTOR1, PREFERENCE_TABLE)</code> <code>in_relation(VECTOR2, PREFERENCE_TABLE)</code>		
Purpose	VECTOR1 and VECTOR2 are both assigned to the I^{th} and J^{th} items of the collection PREFERENCE_TABLE such that $I \leq J$.		
Example	$\left(\begin{array}{l} \langle 1, 0 \rangle, \\ \langle 0, 0 \rangle, \\ \text{tuple} - \langle 1, 0 \rangle, \\ \langle \text{tuple} - \langle 0, 1 \rangle, \\ \text{tuple} - \langle 0, 0 \rangle, \rangle \\ \text{tuple} - \langle 1, 1 \rangle \end{array} \right)$ <p>The <code>cond_lex_lesseq</code> constraint holds since VECTOR1 and VECTOR2 are respectively assigned to the first and third items of the collection PREFERENCE_TABLE.</p>		
Typical	$ TUPLE_OF_VALS > 1$ $ VECTOR1 > 1$ $ VECTOR2 > 1$ $ PREFERENCE_TABLE > 1$		

Symmetries

- Items of VECTOR1, VECTOR2 and PREFERENCE_TABLE.tuple are [permutable](#) (*same permutation used*).
- All occurrences of two distinct tuples of values in VECTOR1, VECTOR2 or PREFERENCE_TABLE.tuple can be [swapped](#); all occurrences of a tuple of values in VECTOR1, VECTOR2 or PREFERENCE_TABLE.tuple can be [renamed](#) to any unused tuple of values.

Usage

See [cond_lex_cost](#).

See also

common keyword: [cond_lex_cost](#), [cond_lex_greater](#), [cond_lex_greatereq](#), [cond_lex_less](#) (*preferences*), [lex_lesseq](#) (*lexicographic order*).

implied by: [cond_lex_less](#).

Keywords

characteristic of a constraint: [vector](#), [automaton](#), [automaton without counters](#), [reified automaton constraint](#).

constraint network structure: [Berge-acyclic constraint network](#).

constraint type: [order constraint](#).

filtering: [arc-consistency](#).

modelling: [preferences](#).

symmetry: [lexicographic order](#).

Automaton

Figure 5.145 depicts the automaton associated with the preference table of the `cond_lex_lesseq` constraint given in the example. Let VAR1_k and VAR2_k respectively be the var attributes of the k^{th} items of the `VECTOR1` and the `VECTOR2` collections. Figure 5.146 depicts the reformulation of the `cond_lex_lesseq` constraint. This reformulation uses:

- Two occurrences of the automaton depicted by Figure 5.145 for computing the positions I and J within the preference table corresponding to `VECTOR1` and `VECTOR2`.
- The binary constraint $I \leq J$.

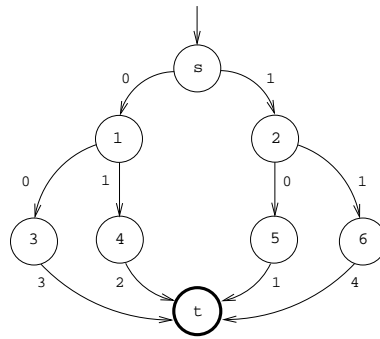


Figure 5.145: Automaton associated with the preference table of the `cond_lex_lesseq` constraint given in the example

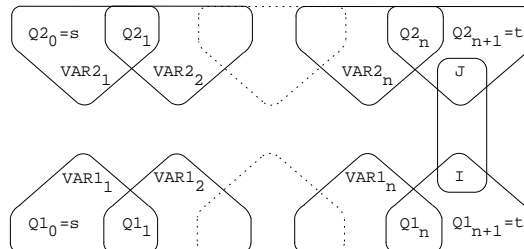


Figure 5.146: Hypergraph of the reformulation corresponding to the `cond_lex_lesseq` constraint: it uses two occurrences of the automaton of Figure 5.145 and the constraint $I \leq J$

20060416

673